Skyco TECHNOLOGIES


COMMERCIAL PA · MATRIX AMPLIFIER

T-4120MP

4-channel matrix amplifier, 4 × 120 W

A 4 × 120 W matrix mixer amplifier with an MP3 player, tuner and RS232 control, for hotels, malls and sports and entertainment centres.

4 × 120 W | 4 zones | Matrix | 3U rack

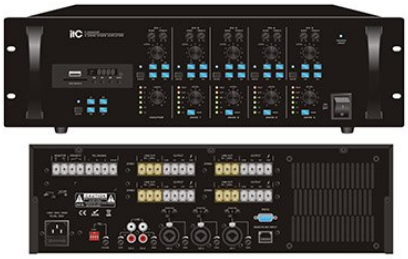

4 × 120 W
RMS output

4
Zones

70 / 100 V
Or 4 Ω per channel

3U
Rack height

Four channels, any source. A matrix in one box.

The T-4120MP is a four-channel amplifier with a built-in matrix: any input can be sent to any of the four zones from the front panel, each with its own bass, treble and volume. Three combo mic/line inputs with phantom power, two RCA inputs, an MP3 player, tuner, TEL input and a priority input cover the sources, and RS232 links it to control systems.

Front-panel matrix
Assign any source to any of four zones.

Tone per input
Separate bass, treble and volume per input.

Combo inputs
Three mic/line inputs, XLR or jack, with phantom power.

MP3 and tuner
MP3 from SD and USB, and a built-in tuner.

RS232 control
For third-party control systems.

Flexible outputs
70 V, 100 V or 4 Ω on every channel.

APPLICATIONS

Hotels | Shopping malls | Sports centres | Entertainment centres | Restaurants | Clubs

Skyco Technologies (Pty) Ltd · 151 Lechwe Street, Corporate Park South, Randjespark, Midrand
+27 11 026 7018 · sales@skycotech.co.za · skycotech.co.za

Specifications. Every input, output and rating.

AMPLIFIER

Output power	4 × 120 W RMS
Outputs per channel	70 V, 100 V, 4 Ω
Protection	Thermal, short circuit, clip, overload

INPUTS

MIC/LINE 1–3	Combo XLR/jack, phantom power, gain
AUX	2 × RCA with gain
Other sources	MP3 (SD, USB), tuner, TEL
Priority input	Overrides all other inputs
Remote paging	RJ45, 4-zone remote mic
Line in and out	4 channels

CONTROL AND PHYSICAL

Control	RS232
Monitor	Built in, with volume
Other	Ground lift switch
Mounting	19" rack, 3U

WORKS WITH

Newer matrix	T-4120UC
Speakers	SK-606TKS, SK-811T

MANUFACTURER

Brand	ITC

Specifications are typical values and may change without notice. Skyco confirms the final configuration with your quote.

Talk to our audio team.

We design the zones, size speakers and amplifiers to 100 V line practice, supply the system and support it.

1. **Design the zones**
2. **Quote**
3. **Supply**
4. **Install**
5. **Support**

Skyco Technologies (Pty) Ltd · 151 Lechwe Street, Corporate Park South, Randjespark, Midrand
+27 11 026 7018 · sales@skycotech.co.za · skycotech.co.za