



**Flush Mounted Box
T-7718**




**Flush Mounted Box
T-7719**




Box Dimension (LxWxD):123x72x32mm
Wall Opening Size(LxWxD):126x75x31 mm

Dimension(LxWxD):129x78x32 mm


Equipped with hidden way

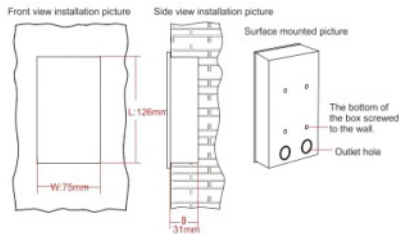

With the way

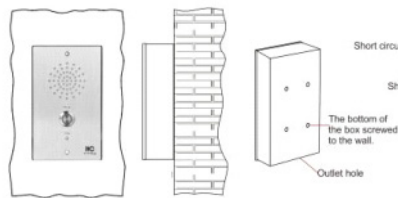

Connection mode

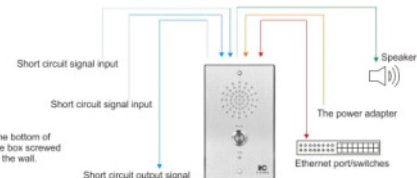

Description:

The one-button for help intercom terminal can initiate an intercom call to the command center.

Features:

- * With embedded rectangular design, simple and smooth appearance, sophisticated lines and durable quality.
- * With embedded computer technology and DSP audio processing technology.
- * One button ask for help, can call the intercom mic of the duty room. Quick connection and easy operation
- * Built-in microphone with high sensitivity, with wide area for sound collection, and high sound reproduction.
- * Built-in 3W full-range monitor speaker, with loud and clear voice.
- * Support hands-free calling and broadcast receiving.
- * Support local electronic door lock and local alarm indicator (select 1 from 2 options).
- * Support 2-channel local short-circuit signal input; linkage with 1 short-circuit output for monitoring short circuit linkage.
- * With crimp DC power supply interface, external connect to 24V power adapter or centralized power supply.
- * Two installation methods: embedded and surface mounted.
- * Waterproof degree: Ip55.
- * With 1 line output, for connecting active speaker to achieve voice paging.
- * Support short-circuit signal input of security equipment, also supports customized setting on the time plan of patrol and sign in for the local area security.
- * Support panel button linkage to 1 short-circuit output or ring alarm, for monitoring short-circuit linkage or emergency tips.
- * Support disassemble panel alarm function, at the same time to link the short-circuit output of multiple devices from local and remote, and connect to alarm or police alarm horn speaker.
- * The system supports remote hardware updating to the terminals, no need to go to the local terminal site, save a lot of maintenance work.

Specifications:

| | |
|---------------------------|-------------------------------------------|
| Model | T-7703 |
| Network Interface | Standard RJ45 input |
| Transmission rate | 100Mbps |
| Protocol Support | TCP/IP,UDP |
| Audio Format | MP3 |
| Audio Mode | 16bit CD sound quality |
| Sampling Rate | 8K~48KHz |
| MIC Input sensitivity | 10mV |
| Frequency Response | 317Hz~3.4KHz |
| Overall Power Consumption | 10W |
| THD | ≤1% |
| SNR | >65dB |
| Operation Temperature | -20°C~60°C |
| Operation humidity | 20%~80% Relative humidity, non-condensing |
| Input Power | ~190-240V 50-60Hz(Adapter); DC24V/1A |
| Dimension | 132x81x39mm |
| Weight | 0.5Kg |