



**2018 BEST WINNER**  
Commercial Integrator 2018 Winner



**Ultra Large Capacity**  
Resolution:  
4Kx2K@60Hz  
Maximum width up to 8K



**Multi Outputs**  
Neutrik EtherCONx16  
OPT Portsx4



**Multiple Video Inputs**  
1xDP1.2  
1xHDMI2.0  
2xDual DVI



**Webpage Control**  
Wireless remote control

## Overview

The MCTRL4K is a high-performance LED display controller developed by NovaStar, designed to support ultra-large loading capacities. A single unit supports a maximum loading capacity of 4096 × 2160 at 60 Hz and allows custom resolution configuration with a maximum width or height of up to 7680 pixels, meeting on-site configuration requirements for ultra-long or ultra-wide LED displays. The MCTRL4K incorporates multiple industry-leading technologies, including HDR, independent RGB gamma adjustment, low-latency processing, 3D display support, and pixel-level brightness and chroma calibration.

These technologies significantly enhance brightness uniformity, grayscale accuracy, and color performance, delivering more detailed, vivid, and consistent images. The MCTRL4K is designed for stable, reliable, and high-performance operation and is suitable for both rental and fixed installation applications, including concerts, live events, security monitoring centers, the Olympic Games, and various sports venues.

# Features

- A variety of input connectors
  - 1x DP 1.2
  - 1x HDMI 2.0
  - 2x DL-DVI
- 16 Neutrik Gigabit Ethernet ports and 4 optical ports
 

For DP/HDMI input, the maximum loading capacity is 8,800,000 pixels.

For DVI input, the maximum loading capacity is 8,300,000 pixels.

The maximum output height or width of a single MCTRL4K is 7680 pixels.

For 10-bit or 12-bit inputs, this function can individually adjust the red gamma, green gamma and blue gamma to effectively control image non-uniformity in low grayscale conditions and white balance offset, allowing for a more realistic image.
- RGB limited to RGB full
 

This function automatically converts the color range of the input source from RGB limited to RGB full so as to display natural black in low grayscale conditions.
- Low latency
 

When low latency and input source sync are enabled, and cabinets are connected vertically, the delay between the input source and receiving card can be reduced to one frame.
- Inputs with decimal frame rates
- High bit-depth inputs: 8bit/10bit/12bit
- HDR function
 

HDR10 and HLG are supported.

The MCTRL4K can work with the receiving cards that support HDR to greatly enhance the image quality of the display, presenting more vivid and detailed images.
- 3D
 

The MCTRL4K can work with the 3D emitter EMT200 and 3D glasses, allowing you to experience 3D display effects.
- Individual gamma adjustment for RGB
 


Adaptive to 23.98/29.97/47.95/59.94/71.93/119.88 Hz
- Pixel level brightness and chroma calibration
 

The MCTRL4K can work with NovaStar's high-precision calibration system to calibrate the brightness and chroma of each pixel, effectively removing brightness differences and chroma differences, enabling high brightness consistency and chroma consistency.
- Ultra-high resolution input
 

Supports ultra-high resolution settings with NVIDIA graphics card.
- Screen configuration on web
- Cascading of up to 10 MCTRL4K units

Table 1-1 Limitations on functions

Function	Limitations	Mutually Exclusive Function
HDR	<ul style="list-style-type: none"> <li>• Supports 10-bit HDMI input sources only.</li> <li>• The loading capacity of each Ethernet port is reduced by half.</li> <li>• Must work with the receiving cards that support HDR.</li> </ul>	N/A
3D	<ul style="list-style-type: none"> <li>• When the input source is DVI, DVI1 loads the images for the left eye, and DVI2 loads the images for the right eye.</li> <li>• When the advanced screen configuration is enabled, 3D function is not supported.</li> <li>• The loading capacity of each Ethernet port is reduced by half.</li> </ul>	Low latency
Low latency	<ul style="list-style-type: none"> <li>• Supports HDMI and DP input sources only.</li> <li>• Each Ethernet port must load cabinets vertically.</li> </ul>	3D, GENLOCK



# Front Panel


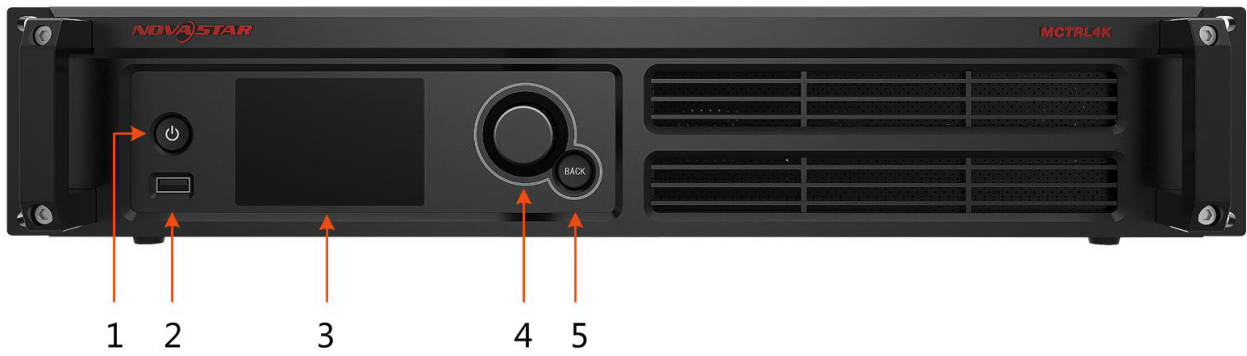


Table 1-2 Buttons and connectors


No.	Button/Connector	Description
1	Power button	Power on or off the device.
2	USB	Connect to a USB drive.
3	LCD screen	Display the device status, menus, submenus and messages.
4	Knob	Select menus, adjust parameters, and confirm operations.
5	BACK	Go back to the previous menu or exit the current operation.

## Rear Panel

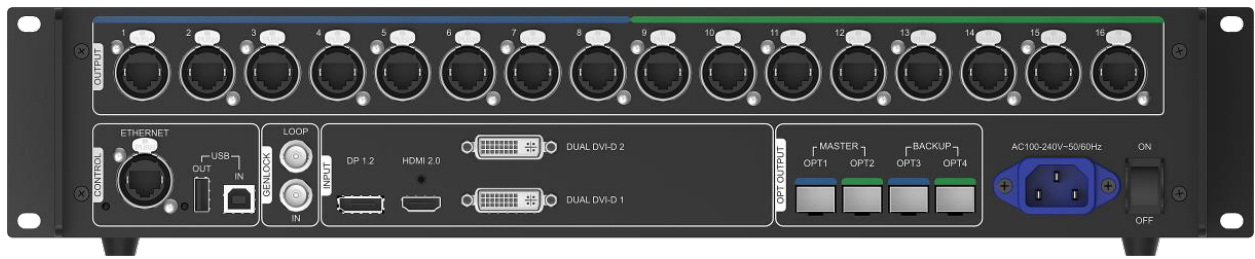

Connector Type	Connector Name	Description
Input	DP 1.2	<p>1x DP 1.2</p> <ul style="list-style-type: none"> <li>Supported maximum resolution: 4096×2160@60Hz, supported minimum resolution: 640×480@24Hz</li> <li>Custom resolutions supported <ul style="list-style-type: none"> <li>Maximum width: 7680 pixels (7680×1080@60Hz)</li> <li>Maximum height: 7680 pixels (1080×7680@60Hz)</li> </ul> </li> <li>HDCP 1.3 compliant</li> <li>Supported standard resolutions: <ul style="list-style-type: none"> <li>1280×1024@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>1366×768@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>1440×900@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>1600×1200@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>1920×1080@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>1920×1200@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>1920×2160@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>2560×1600@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>3840×1080@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>3840×2160@(24/25/30/48/50/60)Hz</li> </ul> </li> <li>No support for interlaced input sources</li> </ul>
	HDMI 2.0	<p>1x HDMI 2.0</p> <ul style="list-style-type: none"> <li>Supported maximum resolution: 4096×2160@60Hz, supported minimum resolution: 800×600@30Hz</li> <li>Custom resolutions supported <ul style="list-style-type: none"> <li>Maximum width: 7680 pixels (7680×1080@60Hz)</li> <li>Maximum height: 7680 pixels (1080×7680@60Hz)</li> </ul> </li> <li>HDCP 1.4 and HDCP 2.2 compliant</li> <li>Supported standard resolutions: <ul style="list-style-type: none"> <li>1280×1024@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> <li>1440×900@(24/25/30/48/50/60/72/75/85/100/120)Hz</li> </ul> </li> </ul>

		<p>1600×1200@(24/25/30/48/50/60/72/75/85/100/120)Hz  1920×1080@(24/25/30/48/50/60/72/75/85/100/120)Hz  1920×1200@(24/25/30/48/50/60/72/75/85/100/120)Hz  1920×2160@(24/25/30/48/50/60/72/75/85/100/120)Hz  2048×1536@(24/25/30/48/50/60/72/75/85/100/120)Hz  2560×1600@(24/25/30/48/50/60/72/75/85/100/120)Hz  3840×1080@(24/25/30/48/50/60/72/75/85/100/120)Hz  3840×2160@(24/25/30/48/50/60)Hz</p> <ul style="list-style-type: none"> <li>• No support for interlaced input sources</li> </ul>
	<p>DUAL DVI-D1  DUAL DVI-D2</p>	<p>2x DL-DVI</p> <ul style="list-style-type: none"> <li>• Each with a maximum resolution of 3840×1080@60Hz and minimum resolution of 800×600@30Hz</li> <li>• Custom resolutions supported  Maximum width: 3840 pixels (3840×1080@60Hz)  Maximum height: 3840 pixels (800×3840@60Hz)</li> <li>• Supported standard resolutions:  1280×1024@(24/25/30/48/50/60/72/75/85/100/120)Hz  1366×768@(24/25/30/48/50/60/72/75/85/100/120)Hz  1440×900@(24/25/30/48/50/60/72/75/85/100/120)Hz  1600×1200@(24/25/30/48/50/60/72/75/85/100/120)Hz  1920×1080@(24/25/30/48/50/60/72/75/85/100/120)Hz  1920×1200@(24/25/30/48/50/60/72/75/85/100)Hz  1920×2160@(24/25/30/48/50/60)Hz  2560×1600@(24/25/30/48/50/60)Hz  3840×1080@(24/25/30/48/50/60)Hz  3840×2160@(24/25/30)Hz</li> <li>• No support for interlaced input sources</li> </ul>
Output	1~16	<p>16x Neutrik (NE8FBH) Gigabit Ethernet ports</p> <ul style="list-style-type: none"> <li>• Maximum capacity of a single port:  For 8-bit input sources: 650,000 pixels  For 10-bit/12-bit input sources: 320,000 pixels</li> <li>• No support for audio output</li> <li>• Support for redundancy between Ethernet ports</li> </ul>
	OPT1~OPT4	<p>4x 10G optical ports</p> <ul style="list-style-type: none"> <li>• OPT1 transmits the data of Ethernet ports 1 to 8.</li> <li>• OPT2 transmits the data of Ethernet ports 9 to 16.</li> <li>• OPT3 is a duplicate channel of OPT1.</li> <li>• OPT4 is a duplicate channel of OPT2.</li> </ul>





Control	ETHERNET	Connect to the control computer.
	USB IN-OUT	<ul style="list-style-type: none"> <li>IN: 1x USB 2.0 (Type-B) Input port for cascading MCTRL4K units, or connecting to a PC for debugging</li> <li>OUT: 1x USB 2.0 (Type-A) Output port for cascading MCTRL4K units</li> </ul>
		Up to 10 units can be cascaded.
	GENLOCK IN-LOOP	Sync signal connector Support for Bi-level, Tri-level, and Blackburst <ul style="list-style-type: none"> <li>IN: Genlock input connector</li> <li>LOOP: Genlock loop output connector</li> </ul>
Power	AC 100 V~240 V-50/60 Hz	

**Notes:**

When the input source is HDMI or DP, the 144 Hz forced resolution input from the front end device can be parsed. In this situation, the loading capacity is reduced by half.

This product can only be placed horizontally. Do not mount vertically or upside-down.


## Dimensions

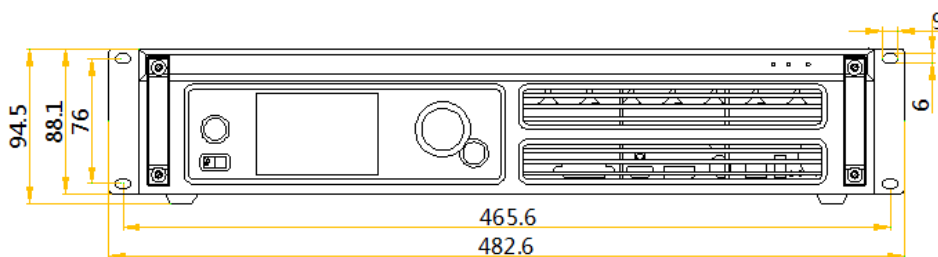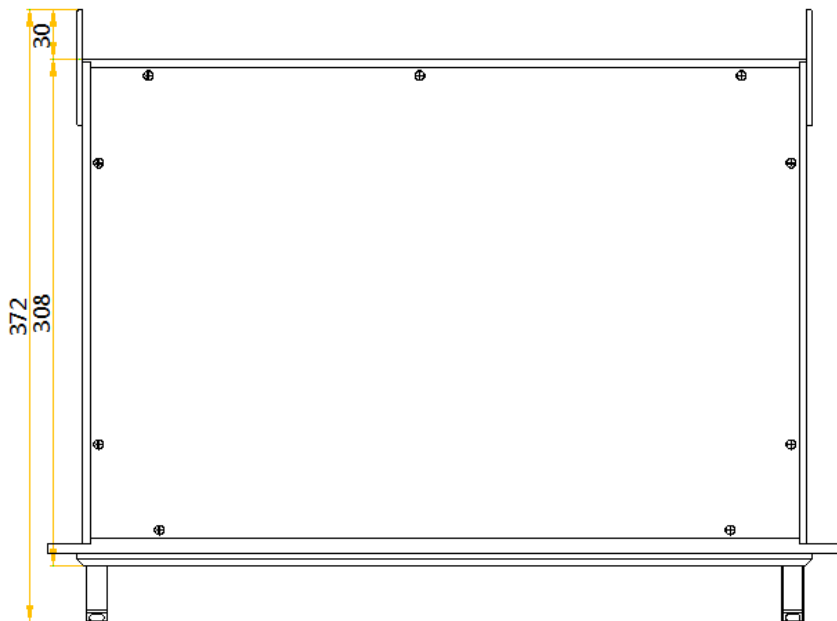

Tolerance:  $\pm 0.3$  Unit: mm

# Specifications

Electrical Parameters	Input voltage	AC 100 V~240 V-50/60 Hz
	Rated power consumption	30 W
Operating Environment	Temperature	-20°C to +60°C
	Humidity	10% RH to 90% RH, non-condensing
Storage Environment	Temperature	-20°C to +70°C
	Humidity	10% RH to 90% RH, non-condensing
Physical Specifications	Dimensions	482.6 mm × 372.0 mm × 88.1 mm
	Weight	4.6 kg
Packing Information	Carrying case	530 mm × 420 mm × 193 mm
	Accessory box	405 mm × 290 mm × 48 mm Accessories: <ul style="list-style-type: none"><li>• 1x power cord</li><li>• 1x Ethernet cable</li><li>• 1x USB cable</li><li>• 1x HDMI cable</li><li>• 1x DP cable</li></ul>
	Packing box	550 mm × 440 mm × 210 mm



## Video Source Features

Input Connector	Features		
	Bit Depth	Sampling Rate	Maximum Input Resolution
HDMI 2.0	8 bit	RGB 4:4:4	4096×2160@60Hz (Setting via NVIDIA graphics card)
		YCbCr 4:4:4	
	YCbCr 4:2:2		
	10 bit/12 bit	YCbCr 4:2:0	
		RGB 4:4:4	3840×1080@60Hz
		YCbCr 4:4:4	
		YCbCr 4:2:2	4096×2160@60Hz (Setting via NVIDIA graphics card)
DP 1.2	8 bit	RGB 4:4:4	4096×2160@60Hz (Setting via NVIDIA graphics card)
		YCbCr 4:4:4	
		YCbCr 4:2:2	
	10 bit/12 bit	RGB 4:4:4	3840×1080@60Hz
		YCbCr 4:4:4	
		YCbCr 4:2:2	4096×2160@60Hz (Setting via NVIDIA graphics card)
Dual-link DVI	8 bit	RGB 4:4:4	3840×1080@60Hz
		YCbCr 4:4:4	
		YCbCr 4:2:2	

## Certifications

FCC, CE, UL&CUL, EAC, CB, IC, KC, RCM

**If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem. Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.**

## Notes for Battery

- The battery is not intended to be replaced.
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery can result in an explosion.
- Leaving a battery in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid or gas.
- A battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas.

